


+91 8686079449 | 7097331516



ALUMINIUM LADDER'S IN HYDERABAD

Heavy Duty Step Ladder & Hangers



- ⇒ Special Fine Grade Alloy Formulation
- ⇒ Folded Light weight
- ⇒ Safe, Steady and Sturdy
- ⇒ Nylon Parts Fitted Hence
- ⇒ Powder Coated Available
- ⇒ Available All Size




PREMIUM HOUSE HOLD PRODUCT
MADE FOR INDIANS



www.laddersales.com

**5 YEARS
WARRANTY**



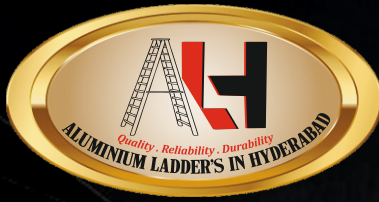

Specialized Customise Aluminum Profile For Industrial Purpose Office & Home Ladder

ALUMINIUM BABY STEP LADDER (Model No. ALIH 102)

ALUMINIUM DOMESTIC LADDERS

- The step ladder is made of high quality and new Aluminium alloy Aluminium Baby Step Ladders strength and durability.
- Easy to used Easy to open close
- Folds to compact ,store almost anywhere
- Safety And Support
- Anti-Skid Shoes.
- Load cap. 120 Kgs

AVAILABLE HEIGHT

Height : 3 Feet	Height : 4 Feet	Height : 5 Feet
Height : 6 Feet	Height : 7 Feet	Height : 8 and 9 Feet



ALUMINIUM SINGLE WALL LADDERS (Model No. ALIH 103)

- Steps: The Steps Are Made Up Of C Section
- Non Slip Flat Step
- Aluminium Alloy 3 Mm Thickness,
- Low Maintenance,
- Light Weight,
- Rubber Shoes : Bottom Legs Provided with Non-skid Heavy Duty Rubber Shoes
- Load Capacity of The Ladder Is 150 to 200 Kg at a Time

AVAILABLE HEIGHT

Sizes 6ft to 20ft



ALUMINIUM SELF SUPPORTING EXTENSION LADDERS (Model No. ALIH 104)

MODEL NO:-104

- Side 'C' Section 65x38mm of 3mm Thickness
- 25.4mm Non-Slip Corrugated Tube permanent punching into the 'C' section
- Operated with Nylon or Polypropylene Rope pulley and Bracket, Lockable Stopper, solid Rubber Shoe and stopper.
- Load capacity, 150 kg to 200 Kg at a time

AVAILABLE HEIGHT

Sizes 6-10 | 8-14 | 10-18 | 12-21 | 14-25 | 16-30 | 18-32 | 20-35 | 22-40 | 24-43



We also provide SS Floor & Ceiling Cloth Hangers



SS Butterfly Hanger

MS Zig Zag Hanger

SS Floor Stand

Aluminium Floor Stand

Ceiling Cloth Hanger

ALUMINIUM SELF SUPPORTING EXTENSION (Model No. ALIH 105) LADDERS WITH WHEELS

- Side 'C' Section 65x38mm of 3mm Thickness
25.4mm Non-Slip Corrugated Tube permanent punching into the C' section
Operated with Nylon or Polypropylene Rope pulley and Bracket,
Lockable Stopper, Solid Rubber Shoe.
- 2 No. Wheels and Handle for Moving one place to other place

Accessories:

Wheels, Handle, Platform, Safety Ring

ALUMINIUM WALL EXTENSION LADDERS (Model No. ALIH 106)

MODEL NO:-106

- Side 'C' Section 65x38mm of 3mm Thickness
- 25.4mm Non-Slip Corrugated Tube permanent punching into the C' section
- Operated with Nylon or Polypropylene Rope with pulley and Bracket
- Lockable Stopper
- Anti-Skid solid Rubber Shoe

AVAILABLE HEIGHT

DOUBLE SECTION : 6-10	8-14	10-18	12-21	14-25	16-30	18-32	20-35	22-40	24/43
THIPLE SECTION : 10/24	12-30	14-36	16-40	18-45	20-50	24-60			

ALUMINIUM STOOL 'A' TYPES LADDERS (Model No. ALIH 107)

- A Type Heavy Duty Industrial Ladder.
- Can Be Used for Cleaning Where house, Offices, Buildings.
- Also Can Be Used In Painting Etc.
- Solid Rubber Shoe.
- Load Capacity,150 To 200 Kg At A Time

AVAILABLE HEIGHT

Sizes : 4FT to 20FT

ALUMINIUM MOBILE STAIR LADDERS (Model No. ALIH 108)

- Mobile Stair Broad Step Aluminium Ladder to our clients.
Extensively used to reach high level areas, this aluminium ladder is offered in varied sizes and heights, carrying strength, light in weight, sturdiness and stable on ground are qualities .
- Two Swivel Wheels and Fixed Wheels are Provided for Easy Movement of The Ladder.
This Mobile Stair Broad Step Aluminium Ladder


AVAILABLE HEIGHT

Sizes 5FT to 24FT



Aluminum Tilttable Tower Ladder (Model No. ALIH 109)

- Aluminium product made from high tensile aluminum alloy.
- Sides of C sections strong yet light in weight.
- Provided with safety limits, safety door, tool tray, platform, wire-rope, pulleys, etc.
- Provided with 2 hand operated double speed winch mechanism (One for extending / lowering another for tilting the ladder).
- Mounted on ms basement for sturdiness with 4 nos of PP wheels for easy mobility.
- Designed specifically to meet the requirement of all industrial maintenance (Malls, Multiplex, Industries, Hospitals, Research Centers, Etc)
- The ladder can easily pass through the gate of (8 feet height 7 feet width).
- This ladder can be operated by 2 or 3 persons easily.

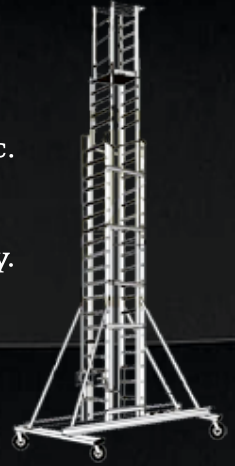

Scaffolding Ladder Aluminium Ladders (Model No. ALIH 111)

The Aluminum tubes used for making the scaffolding towers are made with Grade : Alloy 6082 T6 and LM-06 For die casting and outside diameter accurately gauged to fit properly into the metal couplings and to allow complete interchangeability.


- Fittings and couplings are specially made for the tubes in use and are satisfactory quality as to strength and performance.
- All rungs of the scaffold are uniformly spaced.
- Diagonal bracing is continuous and joined with quick release snap grip (sleeve) coupling.
- Scaffolding is movable on castor wheels, brakes are provided for safety while in operation.
- Scaffold legs can be set on either plain or adjustable bases with the provision of jacking of minimum 200mm length
- All parts of wheel and jack assembly are galvanized to withstand prolonged period of marine atmosphere or corrosive surrounding.
- Platform is stable at any height.

Size of Scaffolding

01. H-frame 1400mm(Width) x 2000mm (Height) (DOUBLE WIDTH MODEL)
02. H-frame 0.750mm(Width) x 2000mm (Height) (SINGLE WIDTH MODEL)
03. Our each H-frame is 6-rungs wherein other manufacturer provides 5-rungs only with Tig Welding.
04. Plain & fluted pipe size: Dia -50 x 2.00 mm Thickness. To restrain durability & Light Weight for H frame only.
05. Platform size: 600mm x 1830mm 02 No's platforms are provided.

Features of Crystal Scaffolding Tower:-

- OUR heavy duty Scaffolding Tower is made of aluminium wrought alloy with accordance to the scaffolding guidelines.
- In Every 6-30 Meters Scaffolding Anti Skid ladders is provided in every 2 meters for convenience
- Special straight braces are provide in-between H-frames for extra Safety.& non-tilt able performance
- This robust, lightweight, simple to assemble compact rolling tower is easy to transport.
- It can be easily dismantled and assembled wherever necessary.
- It has easy locking quick release snap grip couplings for the horizontal and diagonal for fast and easy assembly.
- Anti – Skid horizontal rungs provide additional safety while climbing & assembly.
- Platform with trapdoor and guard railings is ideal for working at heights.
- Additional stabilizers with triangular assembly and easy locking system provide additional stability to the tower.
- Maximum load per platform is 250kgs.
- Manufactured as per En-1004 Standards

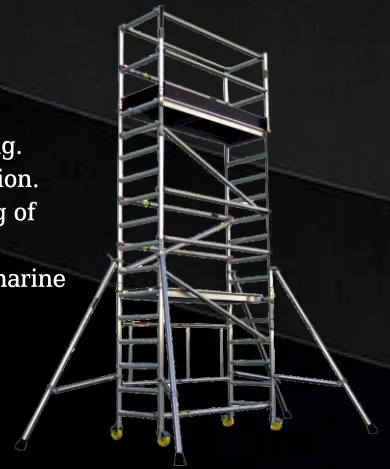

For Further Details Contact

ALUMINIUM LADDER'S IN HYDERABAD

+91 8686079449 | 7097331516

www.laddersales.com

aluminiumladders2022@gmail.com

Plot No.7. H.No : 2-3-655/C/8/1, Durga Nagar, Police Line, Amberpet, Mosarambagh. Hyderabad - 500013, Telangana